


U INTERFACE TRANSFORMER

02932

Designed to interface with the ISDN U-bus and having 50mA line feed capability when used with Mitel MT8910 devices.

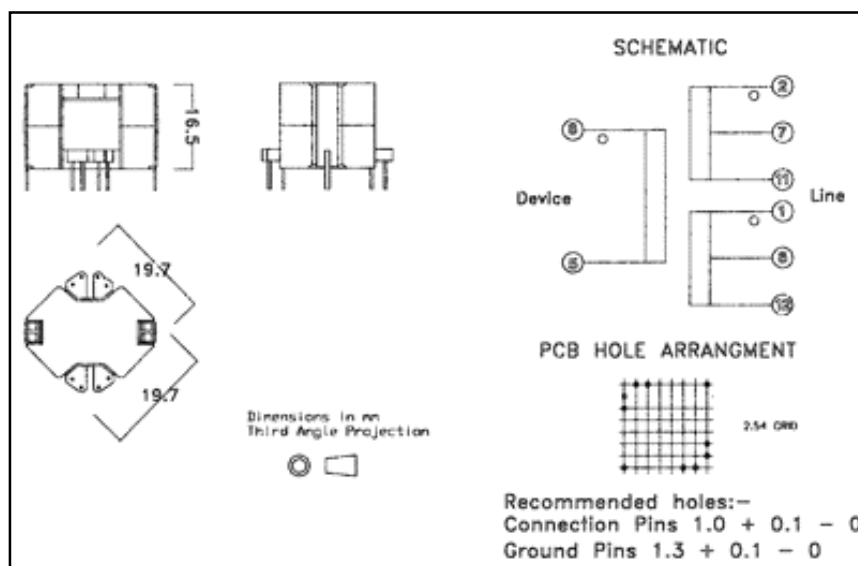

Parameter	Conditions	Value
Inductance	2-12 (1-11 linked)	11mH min
Turns ratio	5-8 : 2-11 : 1-12	1 : 0.65 : 0.65
DC Resistance	8-5 2-11 + 1-12	4.5Ω 5.7Ω
Dielectric strength	8-5 to 2-11 + 1-12	1.5 kV rms
DC line feed capability	-	50 mA
Leakage inductance	8-5 with 2-11 and 1-12 linked	75μH max
Longitudinal balance	0-4kHz 4-160kHz	63dB min 58dB min

Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: www.bestwindings.co.uk

Email: sales@bestwindings.co.uk