


## INPUT TRANSFORMER

# 02908

Designed as a barrier to give reinforced insulation to EN 60950 when used with Mitel MH89790B devices.

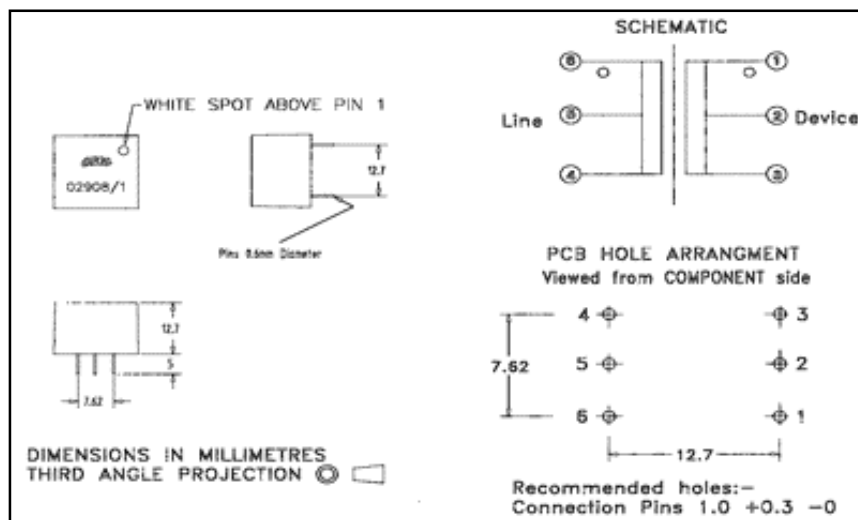

Parameter	Conditions	Value
Inductance	6-4	2.8mH min
Line impedances	-	120Ω
Turns ratio	6-4 : 1-2-3	1.26 : 1 + 1
DC Resistance	6-4 1-3	1.8Ω max 1.2Ω max
Voltage proof test winding to winding	-	4kV rms
Insulation	-	Reinforced to EN 60950
Return loss	-	CCITT/ITU-T G.703
Longitudinal balance	-	CCITT/ITU-T I.431

# Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: [www.bestwindings.co.uk](http://www.bestwindings.co.uk)

Email: [sales@bestwindings.co.uk](mailto:sales@bestwindings.co.uk)