


INPUT TRANSFORMER

02920

Designed for Primary Rate use as an interface between the ISDN and Mitel MT89790B devices.

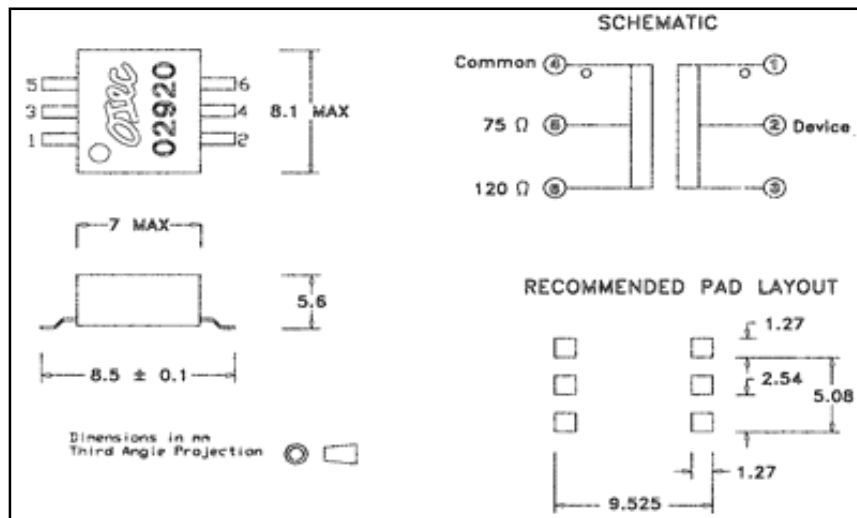

Parameter	Conditions	Value
Inductance	4-6	1.2mH min
Turns ratio	1-2 : 2-3 : 4-6	1 : 1 : 1.26
	1-2 : 2-3 : 4-5	1 : 1 : 1
DC Resistance	1-3	4.0Ω max
	4-6	2.5Ω max
Dielectric strength	4-5-6 : 1-2-3	1.5kV rms
Pulse Mask	-	G.703

Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: www.bestwindings.co.uk

Email: sales@bestwindings.co.uk