


INPUT/OUTPUT TRANSFORMER

02921

Designed for proprietary U interface applications with Mitel MT8971 and MT8972 devices and for connections to twisted pair cable with up to 30mA DC line feed.

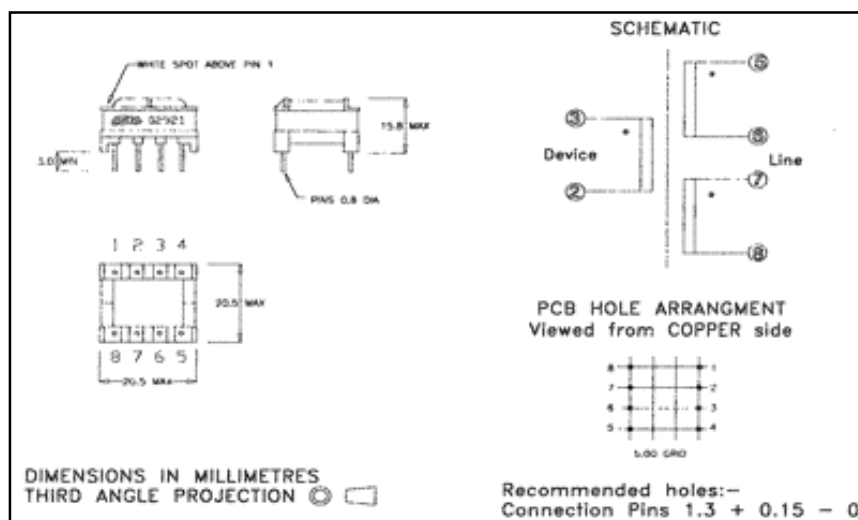

Parameter	Conditions	Value
Inductance	3-2 at 50kHz, 1V	30mH min
Turns ratio	3-2 : 5-6 : 7-8	4 : 1 + 1
DC Resistance	3-2	5.0Ω max
	5-6 + 7-8	2.0Ω max
Line impedance	-	135Ω
Line Feed capability	-	Up to 30mA DC
Voltage proof test winding to winding	-	1.5kV rms
Insulation	-	Supplementary to EN 60950

Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: www.bestwindings.co.uk

Email: sales@bestwindings.co.uk