


## INPUT TRANSFORMER

# 02927

Designed for Primary rate T1 applications operating with Mitel MH89790B devices.

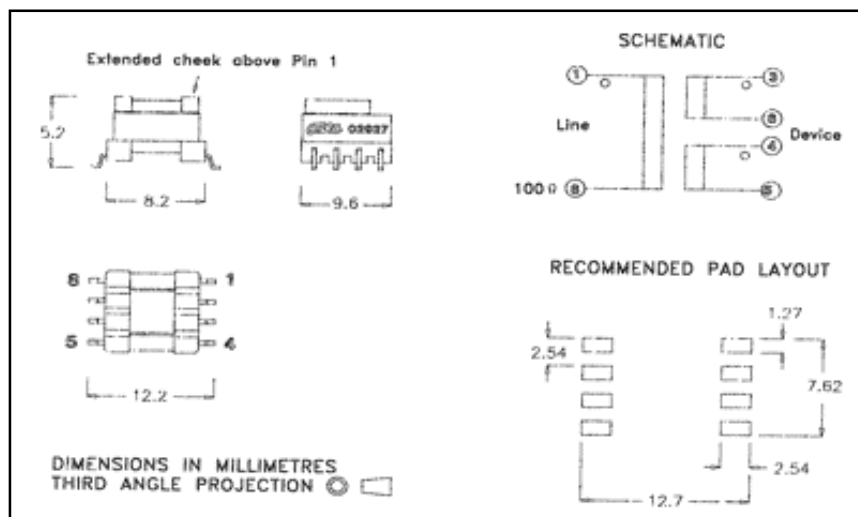

Parameter	Conditions	Value
Inductance	1-8	2.0mH min
Turns ratio	1-8 : 3-6 : 4-5	1 : 1 + 1
DC Resistance	1-8 3-6 and 4-5	1.4Ω max 6.0Ω max
Voltage proof test winding to winding	1-8 : 3-6 + 4-8	1.5kV rms
Insulation	-	Supplementary to EN 60950
Pulse mask	-	ANSI T1.408
Longitudinal balance and Return Loss	-	ANSI T1.408

# Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: [www.bestwindings.co.uk](http://www.bestwindings.co.uk)

Email: [sales@bestwindings.co.uk](mailto:sales@bestwindings.co.uk)