


OUTPUT TRANSFORMER

02930

Designed for line isolation with reinforced insulation to EN 60950 when used with Crystal devices in Primary Rate applications.

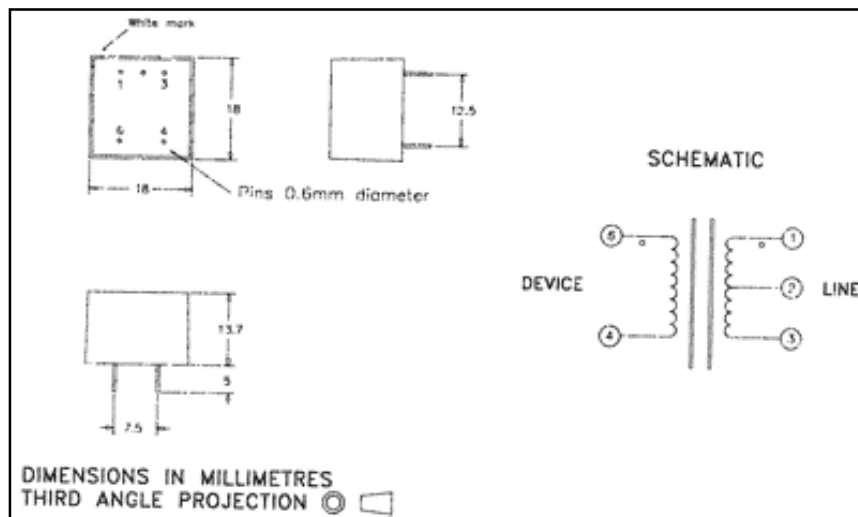

Parameter	Conditions	Value
Inductance	1-3	1.8mH min
Ratio	6-4 : 1-2-3	1 : 1.26 CT
Nominal line impedance	-	120Ω
Isolation test	Between windings	4kV rms
Pulse mask	-	CEPT G.703
Insulation	-	Reinforced to EN 60950
Longitudinal balance	-	Better than 40dB

Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: www.bestwindings.co.uk

Email: sales@bestwindings.co.uk