H.D.S.L. Transformer. 135Ω 1 : 1.8

B5057

Provisional Data Sheet

Features

- 16mm Seated height
- Meets ANSI / ETSI standards
- Tested to 2 kV DC isolation
- Suits 784 kbps
- Designed for use with Level One SK70704
- Flammability to UL94 V0

Dimensions

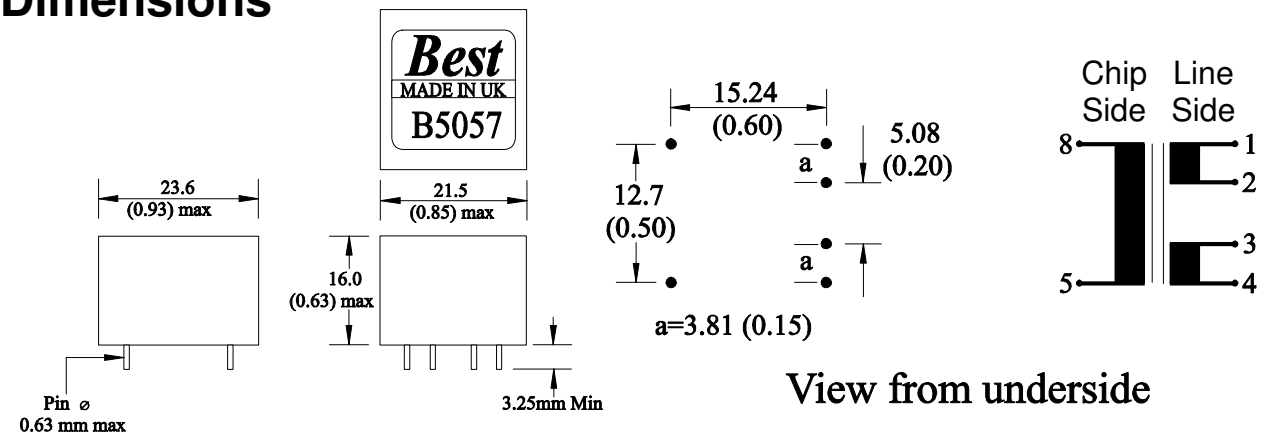

Dimensions in mm (inches) Tolerances ±0.1mm

Recommended PCB hole size 1.0mm Ø

Pin grid and box geometric centres coincide within a tolerance circle of 1.0mm

Technical Data

Parameter	Conditions	Value
Inductance pins 5-8	10 kHz 10 mV	2.75 mH Typical (Chip Side)
Leakage Inductance pins 5-8	100 kHz 10 mV	-
Ratio Pins 5-8 : 1-2 + 3-4		1 : 1.8
Isolation voltage	DC	2 kV
Carrying Current	DC	75 mA Max
DC Resistance	5-8 (Chip side)	3.2 Ω Typical
DC Resistance	1-2 + 3-4 (Line side)	3.0 Ω Typical
Operating Range Functional Storage	Ambient temperature	 -10ºC to 70ºC -40ºC to 125ºC

Best Windings Ltd

www..bestwindings.co.uk

Best Windings Ltd, Viking Works,
Bucklesham Road, Kirton, Ipswich,
Suffolk, England. IP10 0NX
E-Mail: sales@bestwindings.co.uk
Tel:+ 44 (0) 1394 448 424
Fax:+ 44 (0) 1394 448 430

The SK70704 is a product of Level One Communications, Inc®
©The product numbers used are the trademarks of Best Windings Ltd
©1996-2007 Best Windings Ltd. Reproduction Prohibited

November 2007