

Transducer Driver Transformer


B5204

Provisional Data Sheet Nov. 01.

Features

- Small Footprint
- Flammability to UL94 V0
- Usually from stock delivery
- Std Low Cost Hardware
- Other Versions to Order
i.e. S.M.T.

Dimensions

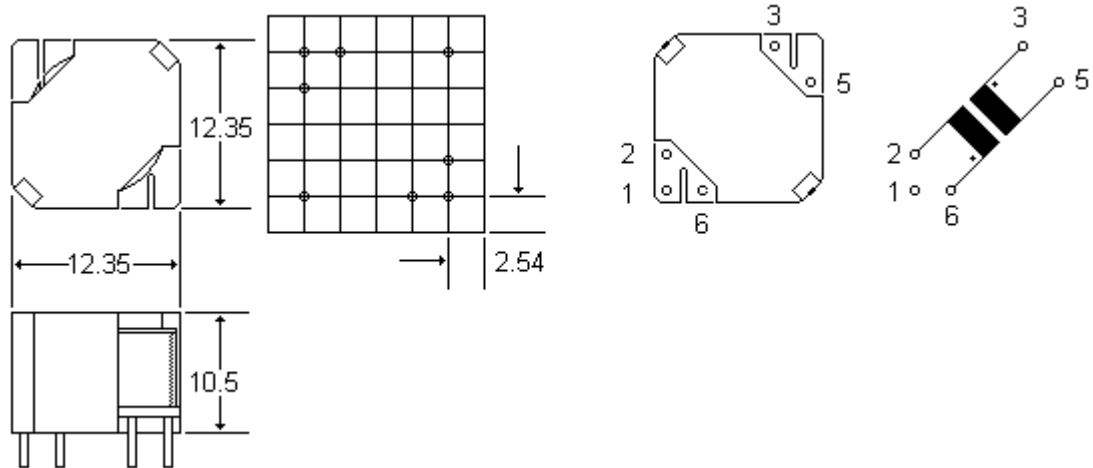

Dimensions in mm
Connection pins require finished hole size of 1.25mm

Tolerances ± 0.1 mm

Technical Data

Parameter	Conditions	Value
Lp pins 3-5	10 kHz	5.4 / 5.8 mH
Ratio 3-5:2-6	10kHz	4.05 : 1
Isolation Voltage	DC	500
Operating range Functional Storage		Ambient Temperature -10°C to +70°C -40°C to +125°C

Best
Windings Ltd

<http://www.bestwindings.co.uk/>

*Best Windings Ltd, Viking Works,
7 Bucklesham Road, Kirton, Ipswich,
Suffolk, England. IP10 0NX
E-Mail: sales@bestwindings.co.uk
Tel: + 44 (0) 1394 448 424
Fax: + 44 (0) 1394 448 430*

©The product numbers used are the trademarks of Best Windings Ltd
©1996 Best Windings Ltd. Reproduction Prohibited

May 1996