


LINE MATCHING TRANSFORMER

00214

- BT Approved
- Low power loss
- Excellent matching characteristics

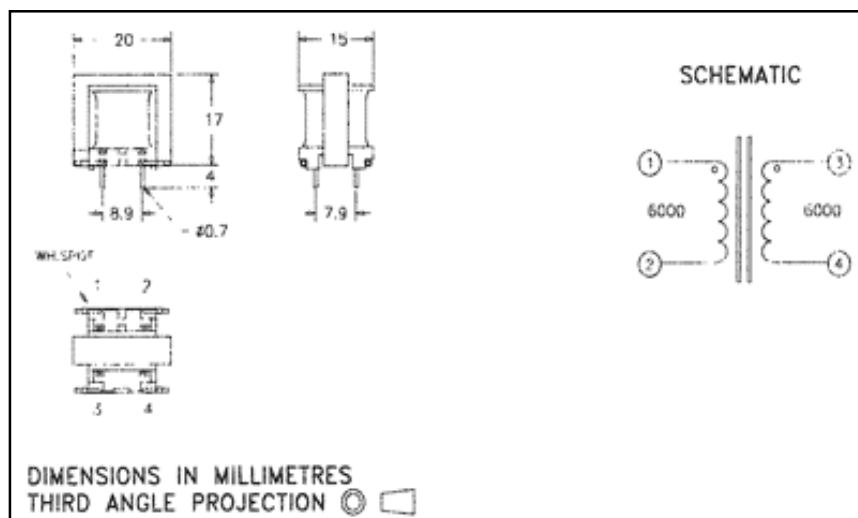

Parameter	Conditions	Value
Frequency Range	-	300Hz to 3.4kHz
Turns ratio	-	1 : 1±1%
Operating level	-	-45dB to +45dB
Impedance Matching	-	600Ω
Insertion loss	-	Less than 0.7dB
Return loss	-	Better than 25dB
Balance	-	Better than 70dB
Isolation	-	500V DC

Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: www.bestwindings.co.uk

Email: sales@bestwindings.co.uk