


MAINS TRANSFORMER

02847

A low Profile Mains Transformer designed for 120 or 240 Volt input (series or parallel primaries) to give 8V + 8V output at 4VA.

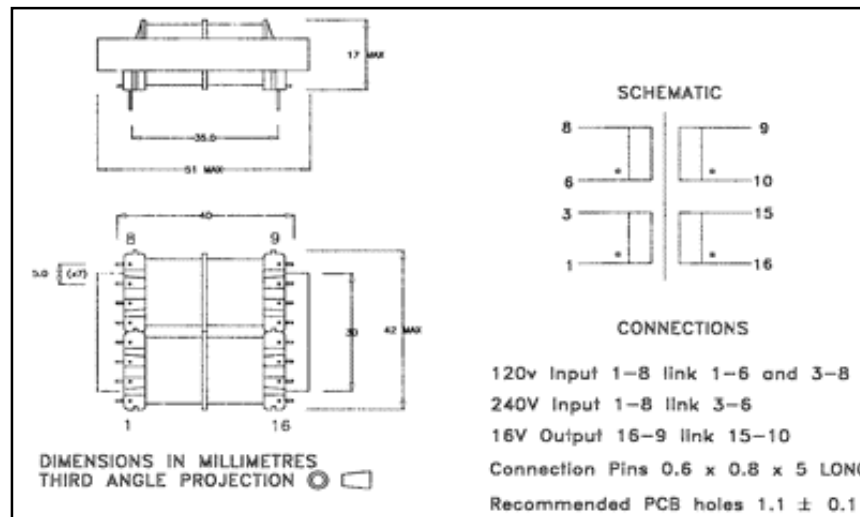

Parameter	Conditions	Value
Input Voltage	1-5 and 6-8	120V ±10% each
Supply frequency	-	49-61Hz
Outputs	9-10 and 15-16	8V @ 0.22A each
Typical regulation	-	30%
Voltage proof test primaries to secondaries	-	3.0kV rms

Primary winding wire leadouts skinned.

Best

Information for guidance only, specification subject to change. © 2007 Best Windings Ltd.

Best Windings Ltd, Viking Works, 7 Bucklesham Road, Kirton, Ipswich, Suffolk, IP10 0NX, UK.

Telephone: +44 (0) 1394 448424

Fax: +44 (0) 1394 448430

Website: www.bestwindings.co.uk

Email: sales@bestwindings.co.uk