

# H.D.S.L. Transformer. 135Ω 1 : 1.8


# B5058

Provisional Data Sheet

## Features

- 16mm Seated height
- Meets ANSI / ETSI standards
- Tested to 2 kV DC isolation
- Suits 1168 kbps
- Designed for use with Level One SK70704
- Flammability to UL94 V0

## Dimensions

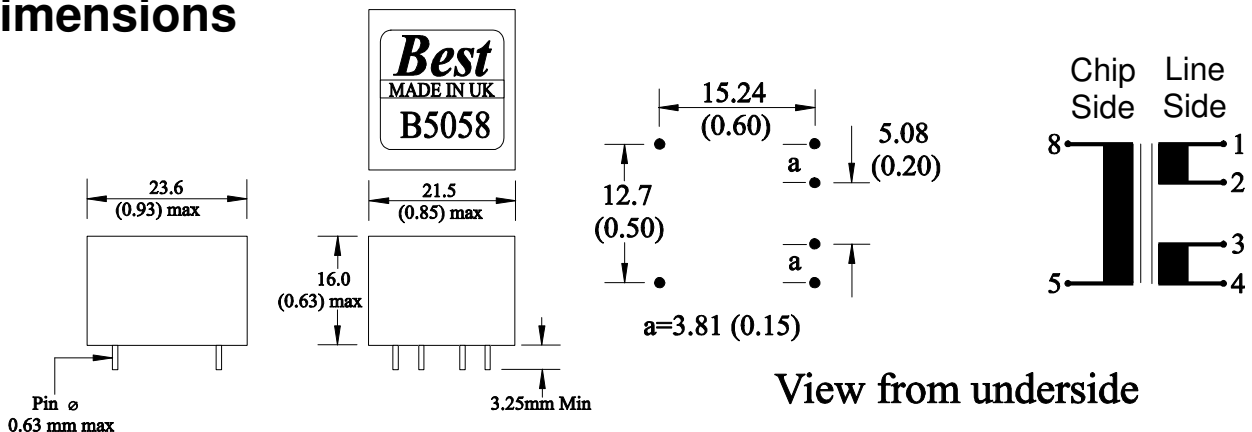

Dimensions in mm (inches)

Recommended PCB hole size 1.0mm Ø

Pin grid and box geometric centres coincide within a tolerance circle of 1.0mm

Tolerances ±0.1mm

## Technical Data

Parameter	Conditions	Value
Inductance pins 5-8	10 kHz 10 mV	2.06 mH Typical (Chip Side)
Leakage Inductance pins 5-8	100 kHz 10 mV	-
Ratio Pins 5-8 : 1-2 + 3-4		1 : 1.8
Isolation voltage	DC	2 kV
Carrying Current	DC	75 mA Max
DC Resistance	5-8 (Chip side)	2.0 Ω Typical
DC Resistance	1-2 + 3-4 (Line side)	2.0 Ω Typical
Operating Range	Ambient temperature	-10°C to 70°C
Functional Storage		-40°C to 125°C

# Best Windings Ltd

[www.bestwindings.co.uk](http://www.bestwindings.co.uk)

The SK70704 is a product of Level One Communications, Inc®  
 ©The product numbers used are the trademarks of Best Windings Ltd  
 ©1996-2007 Best Windings Ltd. Reproduction Prohibited

Best Windings Ltd, Viking Works,  
 Bucklesham Road, Kirton, Ipswich,  
 Suffolk, England. IP10 0NX  
 E-Mail: [sales@bestwindings.co.uk](mailto:sales@bestwindings.co.uk)  
 Tel: + 44 (0) 1394 448 424  
 Fax: + 44 (0) 1394 448 430

November 2007